




FRONT STORAGE, PALLET TYPE (GP-F)

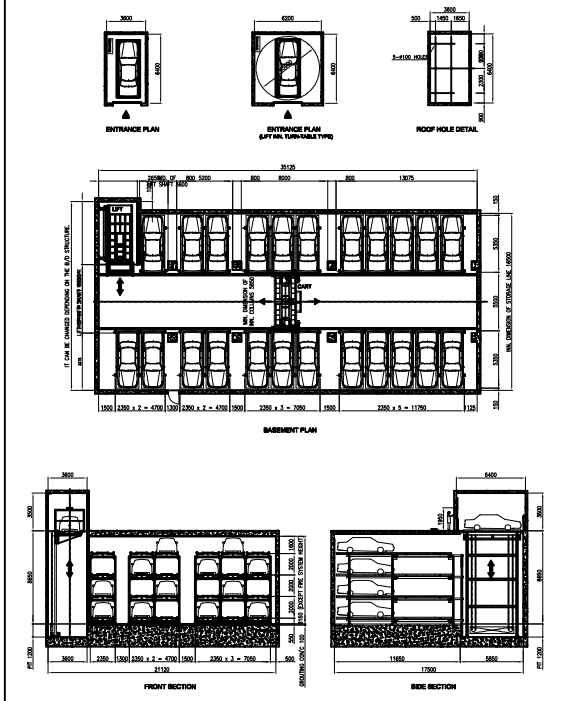


FRONT STORAGE, PALLET, SUV TYPE (GP-F-R)

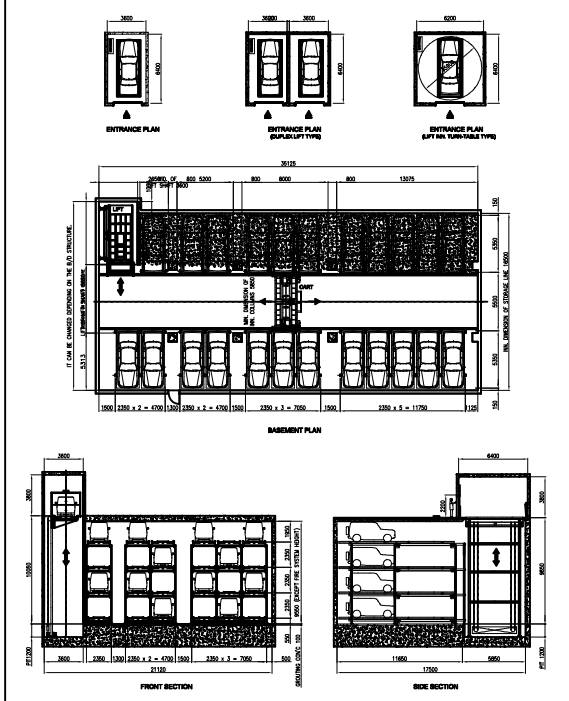


SIDE STORAGE, PALLET TYPE (GP-S)

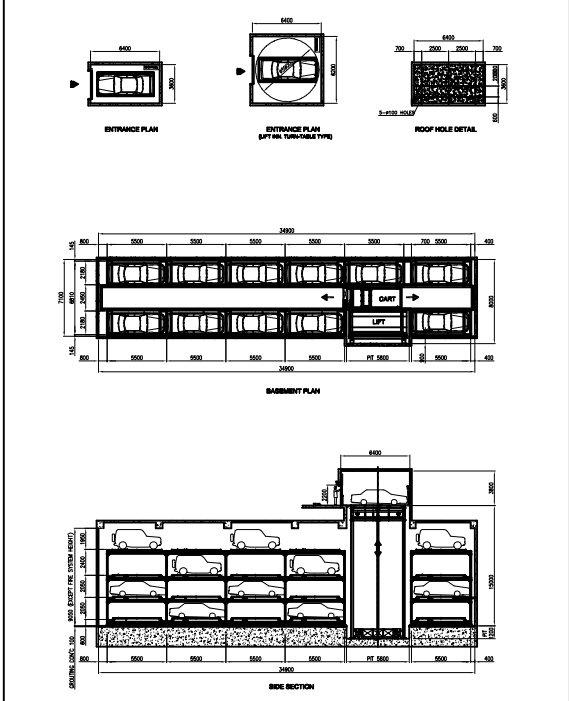


SIDE STORAGE, PALLET TYPE (ONE LIFT-CART/GP-S-C1)

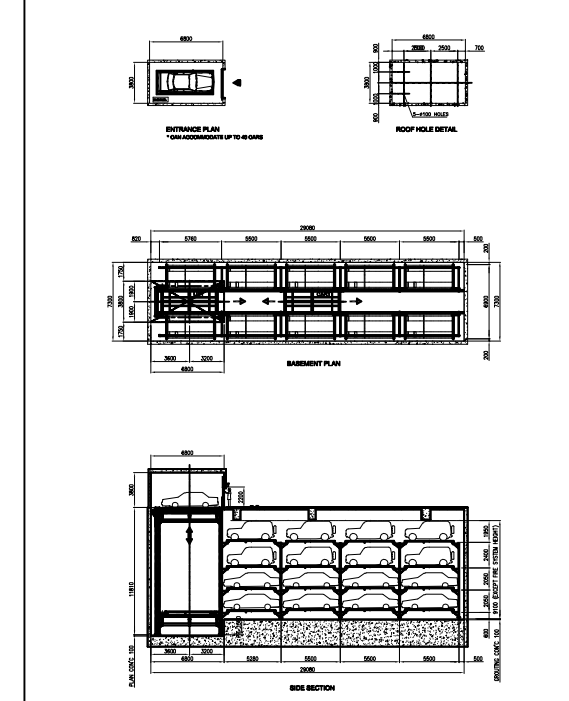

FRONT STORAGE, PALLET TYPE (INN. CART-TURN-TABLE/GP-F-CT)

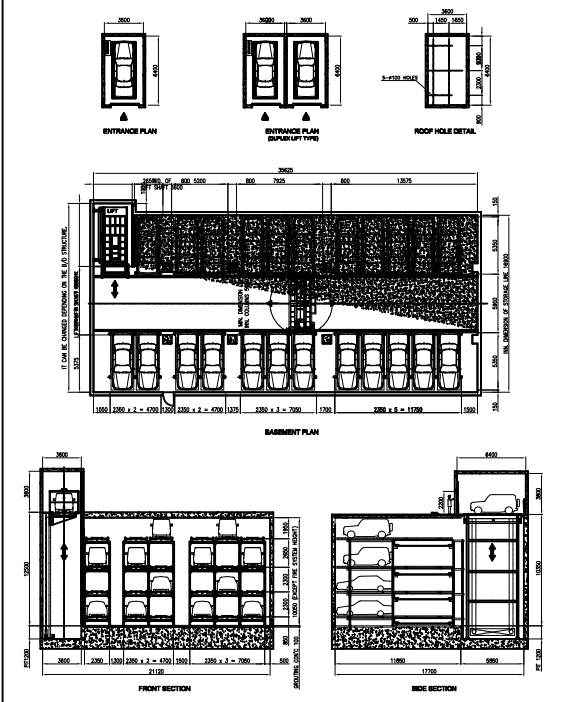

FRONT STORAGE, PALLET TYPE (ONE LIFT-CART/GP-F-CT1)

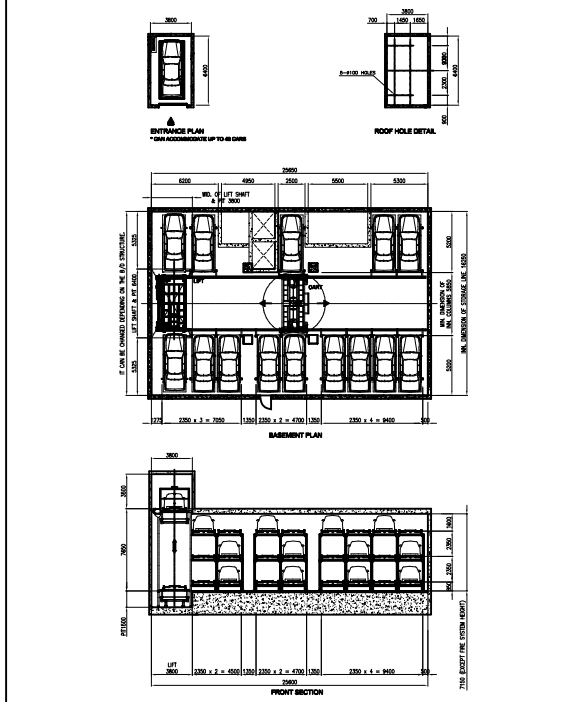

MULTI PARKING

STANDARD SPECIFICATION

No. of Cars	Available Car Size				LIFTING	FORWARD	DRIVING	OPERATION & CONTROL	SAFETY
	CLASSIFI	AZERA	EQUUS	RV	MOTOR				
12 -	LENGTH	16' 6 13/16" (5050 mm)	16' 11 1/8" (5160 mm)	16' 11 1/8" (5160 mm)	18.5-22kW	1.5kW	1.5kW	TOUCH SCREEN PLC CONTROL AUTOMATED PARKING/RETRIEVING PROCESS PROGRAM	TRAFFIC LAMP GUIDE INDICATOR PARKING POSITION CHECKING SENSORS AT THE PLATFORM ANTI OVER-RUN DEVICE EMERGENCY STOP SWITCH VARIOUS SENSORS
	WIDTH	8' 8 11/16" (2050 mm)	7' 5/8" (2160 mm)	7' 5/8" (2160 mm)					
	HEIGHT	6' 1" (1550 mm)	6' 1" (1550 mm)	6' 2 13/16" (1900 mm)	SPEED				
	WEIGHT	8' 13/16" (1850 mm)	7' 2 5/8" (2200 mm)	7' 2 5/8" (2200 mm)	Max 90m/min	Max 150m/min	45m/min		

* The Width is included the side mirrors dimension.

2					PROJECT						
1					PART NAME		OPTIMA PARKING				
REV	DETAIL OF REVISION	DATE	DESIGNED	APPROVED	PROJECTION	SCALE	DATE	DESIGNED	CHECKED	APPROVED	
THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF PARKMATIC AND SHALL NOT BE GIVEN, COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT.		NEW YORK OFFICE, USA						SR	MW		
		1129 Northern Blvd Suite #400 Manhasset, NY 11030			DWG. NO				REVISION		
		E: info@parkmatic.com P: +1-800-422-5438 W: parkmatic.com			PARKMATIC AUTOMATED & MECHANICAL PARKING SYSTEMS						