


SPECIFICATIONS			
MODEL NO.	VSS-PH3-S		
SYSTEM TYPE	TRIPLE STACKER		
PARKING CAPACITY	3 CARS		
AVAILABLE CAR	WHEELBASE	10'-2"	(3,100 mm)
	TRACK*	5'-7"	(1,700 mm)
	HEIGHT	6'-6 3/4"	(2,000 mm)
	WEIGHT	5512 lbs	(2,500 kg)
CYLINDER	PISTON Ø120, ROD Ø40, 2070st		
LIFTING SPEED	18'-0 1/2"/min (5.5 m/min)		
WORKING PRESSURE	1707 psi (120 kg/cm ²)		
POWER REQS	AC220V/380V/460V, 3PH, 50Hz		

* TRACK DIMENSION ASSUMES 9 1/4" (235mm) TIRE WIDTH

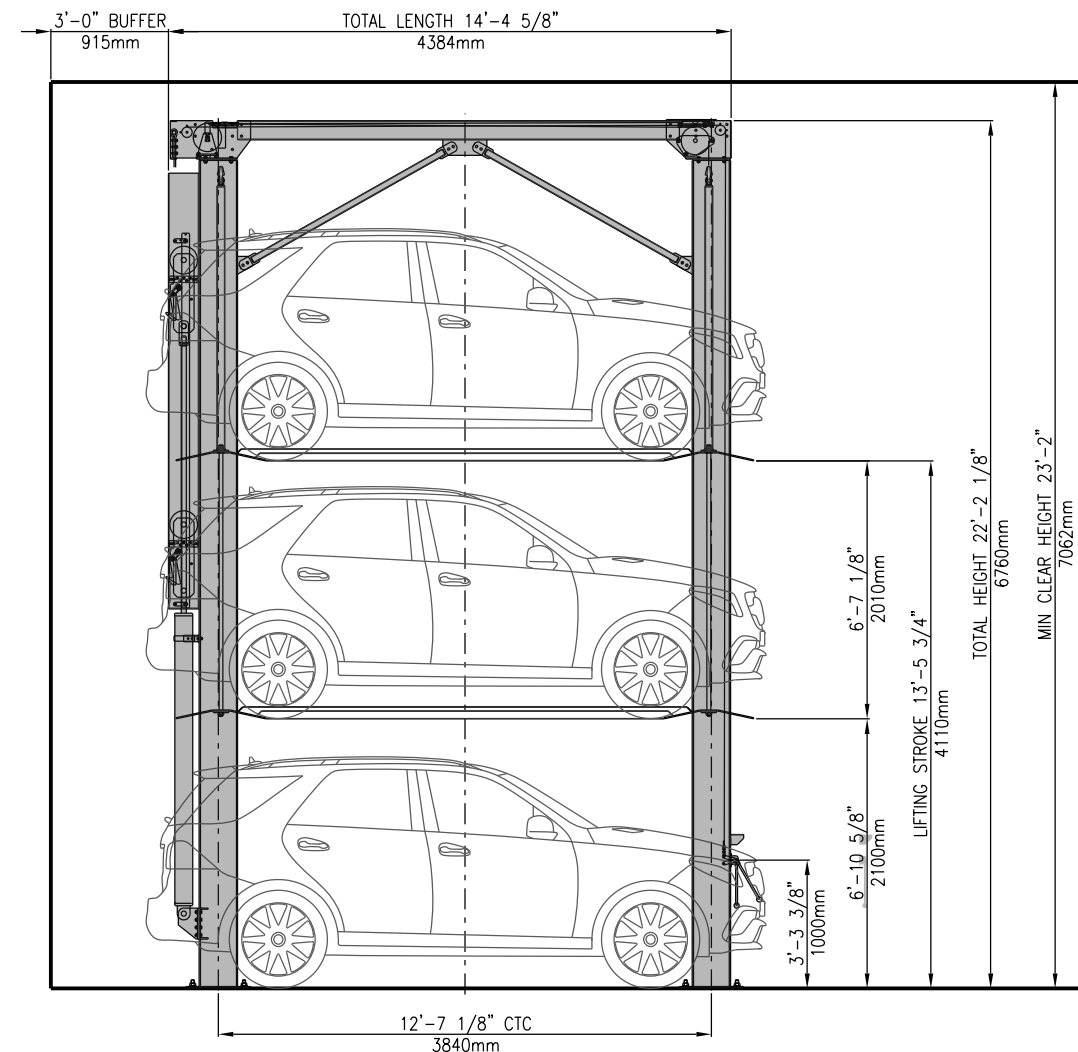

REV	DETAIL OF REVISION	DATE	DESIGNED	APPROVED	PROJECT	PART NAME	PROJECTION	SCALE	DATE	DESIGNED	CHECKED	APPROVED
2					PROJECT	VSS-PH3-S TRIPLE STACKER (ALL SUV)				SR	MW	
1												
THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF PARKMATIC AND SHALL NOT BE GIVEN, COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT.					NEW YORK OFFICE, USA 1129 Northern Blvd Suite #400 Manhasset, NY 11030 E: info@parkmatic.com P: +1-800-422-5438 W: parkmatic.com			DWG. NO		REVISION		
					PARKMATIC		PARKMATIC AUTOMATED & MECHANICAL PARKING SYSTEMS					